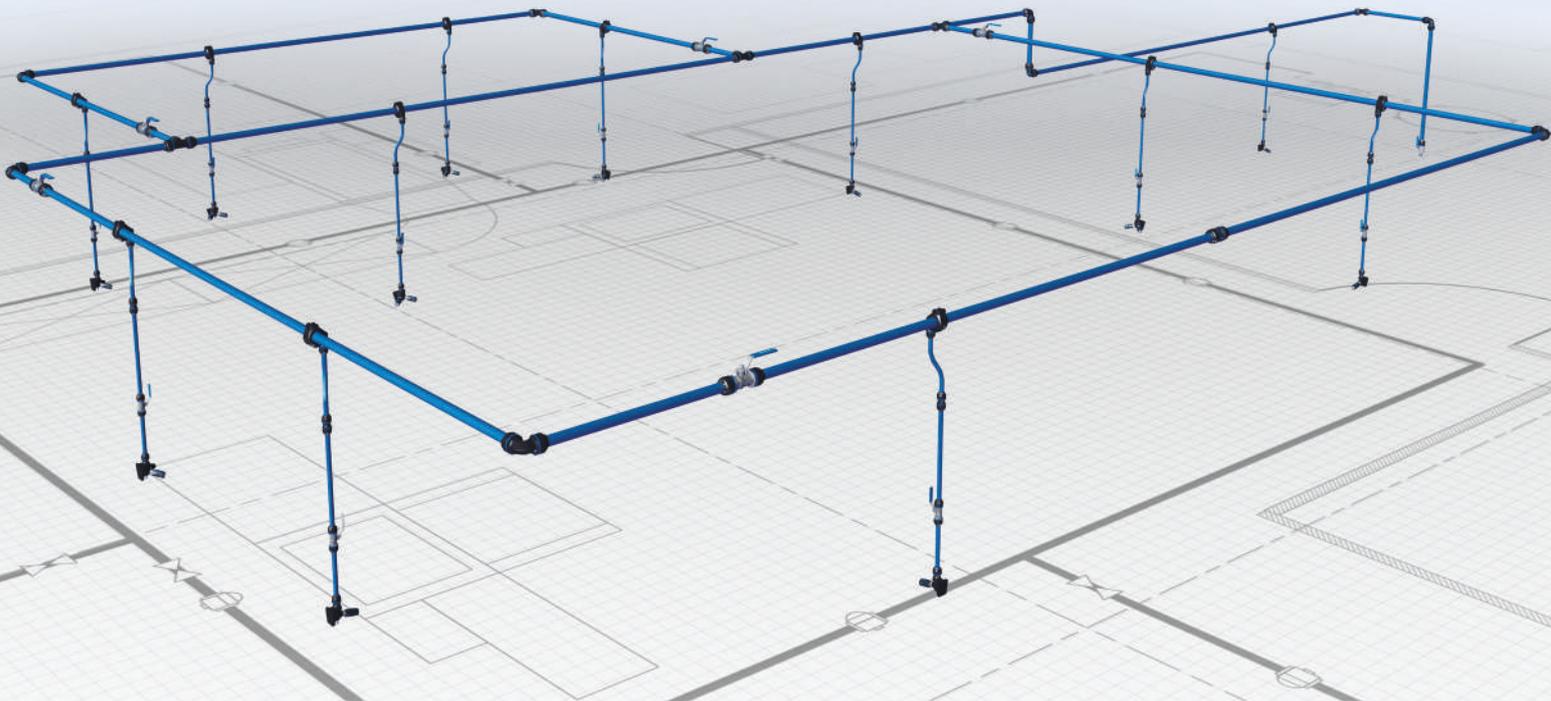




CONNECTED TO INNOVATION

The full aluminium concept



PREVOST PIPING SYSTEM
COMPRESSED AIR NETWORK

PREVOST : a manufacturer at the heart of your networks, connected to innovation

For more than 40 years, PREVOST has been successfully **designing, manufacturing and marketing** a comprehensive range of products for **compressed air and fluid distribution networks, including safety fittings, filtration solutions and pneumatic equipment.**

Prevost has become the preferred partner for companies using pneumatic and hydraulic power.

Every day, our teams work to expand the horizon for our customers :

- through innovation and constantly seeking areas for improvement,
- through the quality of our products, advice and services.

➔ CONNECTED TO INNOVATION

An R&D strategy for patented products: PREVOST offers products that provide increasingly optimised performance and enhanced safety, and comply with all applicable standards.

Making the best use of our products: our solutions enable you to optimise yield and improve your return on investment.

European manufacture: our new **PREVOST PIPING SYSTEM** networks range, made entirely from aluminium, is designed and produced in Europe.

➔ CONNECTED TO QUALITY

Prevost is certified according to :



ISO 9001



TÜV : certification of compliance with the Pressure Equipment Directive. PED 2014/68/EU

Our products comply with the requirements of:



Quality of pipe coating



the **REACH** standard: Registration, Evaluation, Authorisation and restriction of Chemicals

- **Standard for fire rating of construction products and components (EN 13501-1)**



➔ CONNECTED TO YOUR BUSINESS REQUIREMENTS

We comply with the requirements of **all industries, specialised distributors, decision-makers, architecture firms, design offices and installers.**

➔ CONNECTED TO YOUR NEEDS

PREVOST possesses a technical unit dedicated to your designing your network.

▶ **DIAGRAMS and QUOTATION**
for your planned facility ON REQUEST

A web application is accessible via smartphones and tablets.

First-class logistics: our team manages logistical flows so as to ship products on the same day as you place your order.

Our training centre enables you to reinforce your knowledge of our products and fluid mechanics.

Our dynamic and responsive sales force is present in more than 80 countries.

Our after-sales department is at your service



What is a compressed air network?

A compressed air network involves **linking a source of compressed air, i.e. one or more compressors, to a designated distribution points.**

The structure of PREVOST networks is made of aluminium pipes. These are fixed at a **minimum height of 2.5 m** from the floor and form the primary loop of the network.

From this loop, pipe with a smaller diameter, known as “**drops**” feed off. Their ends are approximately **1.2 m above the floor.** These are **compressed air distribution points** where equipment such as safety fittings, filters, hoses, etc., can be attached.

** The warranty is limited to the replacement value of defective products. The products must be used as instructed in the technical manuals (temperature, ambience, pressure, etc.)*



➔ NETWORK DESIGN

To design a network, **the pipe diameter must be calculated by taking the desired flow rate and the length of the main pipe.** The data below is calculated for operating pressure of 8 bar with 5% pressure loss.

COMPRESSOR*					LENGTH OF MAINLINE									
POWER		FLOW RATE			50 m	100 m	150 m	300 m	500 m	750 m	1000 m	1300 m	1600 m	
kW	CV	Nm ³ /h	NI/min	Scfm	164 ft	328 ft	492 ft	984 ft	1640 ft	2460 ft	3280 ft	4265 ft	5249 ft	
2,2	3	22	367	13	16	16	20	20	25	25	25	25	32	
3	4	30	500	18	16	20	20	25	25	25	32	32	32	
4	5	40	668	24	20	20	20	25	25	32	32	32	32	
5,5	7,5	50	833	29	20	20	25	25	32	32	32	32	40	
7,5	10	70	1167	41	20	25	25	32	32	32	40	40	40	
11	15	100	1667	59	25	25	32	32	40	40	40	50	50	
15	20	150	2500	88	25	32	32	40	40	50	50	50	50	
18	25	180	3000	106	32	32	40	40	50	50	50	63	63	
22	30	220	3674	130	32	40	40	50	50	50	63	63	63	
26	35	260	4167	147	32	40	40	50	50	63	63	63	63	
30	40	350	5833	206	40	40	50	50	63	63	63	63	80	
37	50	370	6179	218	40	40	50	50	63	63	63	63	80	
45	60	500	8350	294	50	50	50	63	63	80	80	80	80	
55	75	550	9185	324	50	50	50	63	63	80	80	80	80	
75	100	750	12500	441	63	63	63	63	80	80	80			
90	125	1000	16667	589	63	63	63	80	80					
110	150	1100	18370	649	63	63	63	80	80					
132	175	1500	25000	883	63	80	80	80						
160	215	1750	29167	1030	63	80	80	80						
200	270	2000	33333	1177	80	80	80							

* These values may vary slightly from compressor data

➔ EXPANSION OF MATERIALS

As the temperature rises and falls, aluminium is subject **to expansion and contraction.** To compensate for these variables, **it is recommended that the systems be designed to allow this movement.**

For small diameters, a hose will play this role. For larger diameters, expansion kits will perform the function. They also make it possible to **change direction** (corners) and **divert around obstacles** in the workshop (pillars, beams, etc.).

Expansion coefficient: 0.024 mm per metre and per degree Celsius.

Expansion is calculated as follows:

C = Expansion coefficient

L = Length of the straight stretch (between two fixed points)

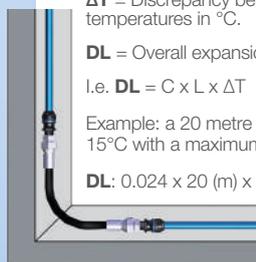
ΔT = Discrepancy between the maximum and minimum ambient temperatures in °C.

DL = Overall expansion

i.e. **DL** = C x L x ΔT

Example: a 20 metre line using 40 mm piping, at an ambient temperature of 15°C with a maximum temperature of 40°C, i.e. a difference of 25°C

DL: 0.024 x 20 (m) x 25°C (40 °C - 15°C) = 12 mm



PREVOST PIPING SYSTEM

The 100% aluminium concept

The **PREVOST PIPING SYSTEM** compressed air network range is compact, **lightweight and corrosive resistant with all aluminum fittings.**

The system is **quick, easy to install** and can be pressurised immediately.

The **PREVOST PIPING SYSTEM** range ensures:

- a **clean** and **high quality** air supply
- a **leak free network** with an **optimised flow rate**
- a max operating pressure of 16 bar.

The network will provide a **long service life** and can easily be configured so each workstation is well supplied, **accessible and organised.**

Advantages of the new **PREVOST PIPING SYSTEM** range

➔ COMPACT AND LIGHTWEIGHT

The upgraded design of the new **PPS1** aluminium fitting is more **compact, lighter and vibration resistant.**

➔ HIGH-TECH MATERIAL

The aluminium alloy used during construction combined with epoxy paint on the outside and a treatment on the inside, **protects the pipe against any risks of oxidation and corrosion.**

➔ IMPACT STRENGTH

Aluminium is tough to withstand **pressure and impacts.**

➔ QUICK AND EASY TO ASSEMBLE

Simply insert the pipe into the fitting, **and then tighten the PPS1 fitting.**

➔ FULLY ADAPTABLE

The **PPS1** fitting ensures that facilities are modular and scalable.

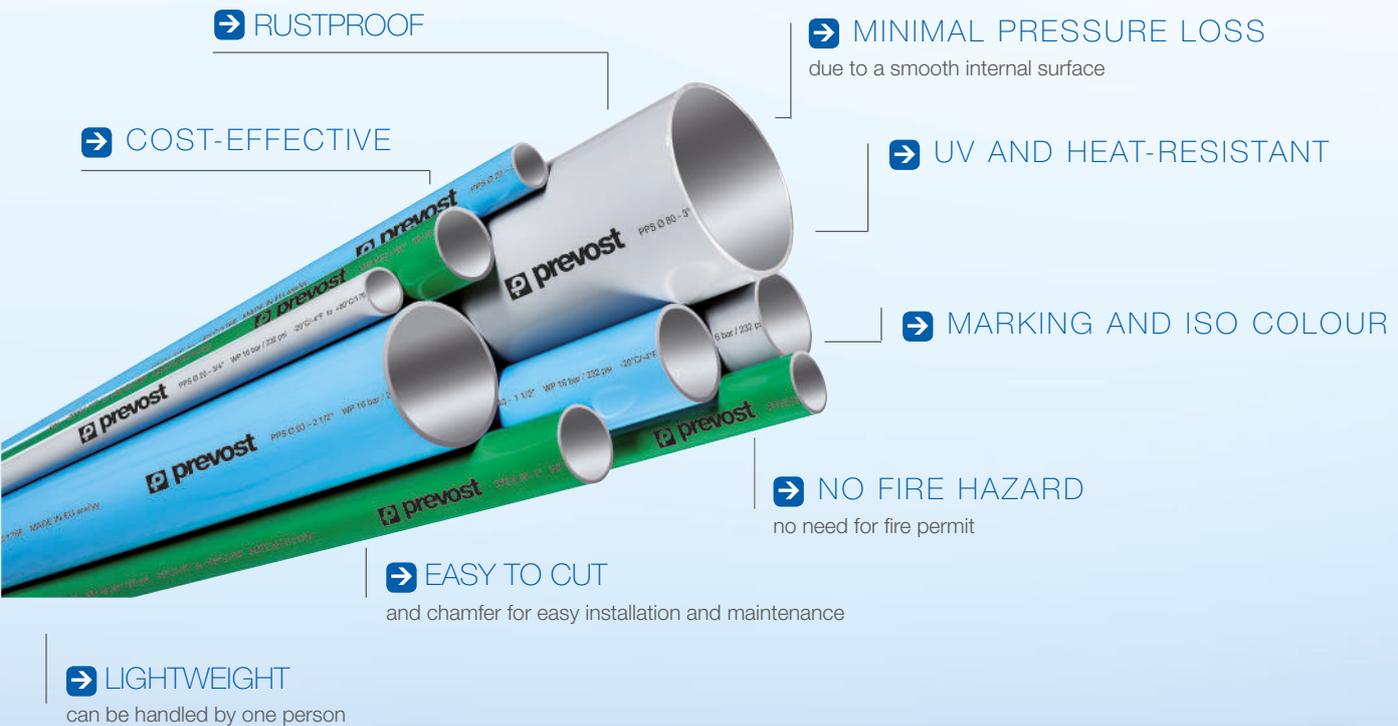
➔ COMPATIBILITY WITH COMPRESSOR

➔ LEAK FREE WITH MINIMAL PRESSURE LOSS

The « **PPS Grip Concept** » guarantees a **flawless connection** and zero leaks. **Flow rates** are **optimised** thanks to a perfectly smooth internal pipe surface, a low friction coefficient and a large internal diameter.

PREVOST PIPING SYSTEM

100% aluminium pipes



PIPE PROPERTIES

- **Material:** extruded aluminium alloy: EN AW 6060 T6 UNI-EN 573-3
- **Treatment:** interior and exterior (compliant with RoHS standard)
- **Coating:** electrostatic paint
- **Extrusion quality:** calibrated, seamless
- **Compatible fluids:** compressed air, vacuum, neutral gases
- **Pipe lengths:** 4 or 6 metres
- **Density:** 2.7 kg/dm³
- **Pipe external diameter:** Ø 16, 20, 25, 32, 40, 50, 63, 80 mm

Prevost offers a wide range of 100% aluminium pipes for compressed air, vacuum and nitrogen.

Blue compressed air pipes, RAL 5012		Grey compressed air and vacuum pipes, RAL 7001		Green nitrogen pipes, RAL 6029	
Ø 16	PPS BTU1640	Ø 16	PPS GTU1640	Ø 20	PPS VTU2055
Ø 20	PPS BTU2040	Ø 20	PPS GTU2055	Ø 25	PPS VTU2555
Ø 20	PPS BTU2055	Ø 25	PPS GTU2555		
Ø 25	PPS BTU2540	Ø 32	PPS GTU3255		
Ø 25	PPS BTU2555	Ø 40	PPS GTU4055		
Ø 32	PPS BTU3240	Ø 50	PPS GTU5055		
Ø 32	PPS BTU3255	Ø 63	PPS GTU6355		
Ø 40	PPS BTU4040	Ø 80	PPS GTU8055		
Ø 40	PPS BTU4055				
Ø 50	PPS BTU5055				
Ø 63	PPS BTU6355				
Ø 80	PPS BTU8055				

PREVOST PIPING SYSTEM

The 100% aluminium fittings

PREVOST designs and manufactures its new **PPS1** 100% aluminium fittings to ensure that **they are the most compact and effective on the market.**

➔ New concept

Pipes are firmly held in the fitting using a the « **PPS Grip Concept** ».
This new concept is based on a **stainless steel ring** with teeth that penetrate the aluminium.
The **new contoured and lubricated seal design** guarantees a leak free performance.

➔ IDENTIFICATION

The Prevost logo is engraved on each fitting.



➔ DIAMETER

Pipe external diameter (mm and inches).



➔ PRESSURE

Maximum service pressure (bar/psi).



➔ MARKER

to indicate that the pipe is correctly positioned in the fitting.



➔ TRACEABILITY

clearly marked date of manufacturing code.



➔ LEAK FREE

It is comprised of two Teflon-coated lobes to create a perfect leak free seal.

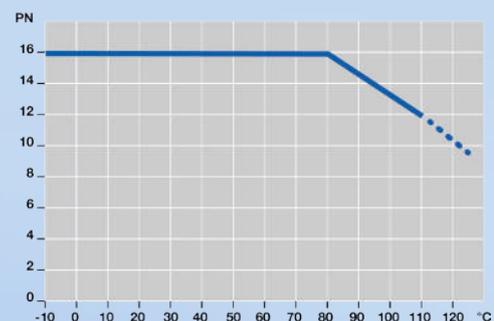
➔ INTERNAL PARTS

Internal parts cannot be detached from the body after assembly.

➔ TECHNICAL SPECIFICATIONS

- **Working pressure range:** from -0.98 bar to 16 bar
- **Temperature range:** from -20°C to 80°C
- **Body and nut:** 100% aluminium, EN AB 46100
- **PPS Grip Concept:** fastening system using teeth
- Tapping port flange to manage condensates

Operating pressure graph as a function of temperature



New range of **PPS1** 100% aluminium fittings:
the most comprehensive on the market

➔ **Diameters from 16 mm (1/2") to 80 mm (3")**



➔ **Numerous configurations**

Straight fittings



Union fitting Reduction Cap Threaded straight connector, male Threaded straight connector, female

Elbows



90° elbow 90° threaded elbow, male 45° elbow

T-fittings



Equal T-fitting Reduced T-fitting Threaded T-fitting, female

PREVOST PIPING SYSTEM

100% aluminium fittings

→ Tapping flange

The body and nut are made **entirely of aluminium**. The tapping flange is extremely compact, and is fitted **with an anti-rotation** system and removable half-shell. It can be drilled without disassembly.

The tapping flange provides a dry air supply to workstations by drawing air from the wall of the pipe.

The water remaining in the lower portion of the main pipe will drain to a low point to automatic drain trap.



→ Valves

Multiple options available :



pipe/pipe



threaded male/pipe



threaded female/pipe

→ Tightening

The nut and body can be tightened using standard tools. PREVOST wrenches are strongly recommended to ensure that the nut is tightened correctly.

Torque can be set using a torque wrench.



PREVOST PIPING SYSTEM

Guidelines for network installation



Ideally, the **compressor room** should be **spacious, well ventilated, insulated and separated from the rest of the workshops.**

Machines will be **connected** to the **PPS** network by **hoses** to eliminate problems related to vibrations and to allow for maintenance (refs. LEF and LEM). It is important **to install bypasses between each machine, the tank(s) and filters.**

The **main** network should form **a loop**. For safety reasons, we advise installing the main compressed air pipes at a minimum height of **2.50 m** above floor level.

The pipe must be fastened using an adequate **number of sliding clamps** so the system is securely held in place yet allowing for expansion and contraction of the pipe (ref. PPS CI).

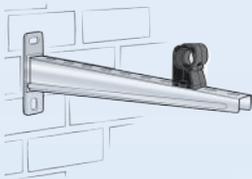
The **remaining condensates** must be **drained** from the main line via direct **drops installed lower** than the bottom generating line of the pipe and **fitted** with an automatic drain trap system.

➔ Mounting the network

Mounting options must be selected to best suit the configuration of the workshop.

The pipe in the system must be mounted in a perfectly **level alignment**.
To do so, **accurate distances are to be established between each mounting point**.
For correct assembly, a distance of **3 metres** should be left between the two clamps.

Pipe at a distance from the wall



Pipe parallel to the wall



Pipe suspended



Pipe suspended



PREVOST PIPING SYSTEM

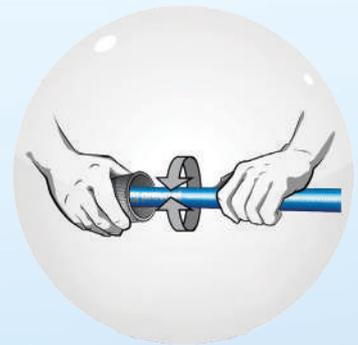
Assembly guidelines

CUTTING



The pipe must be cut perpendicular to its length (ref. PPS CTU).

CHAMFERING



Chamfer the external edge of the pipe to avoid damage to the seal and the inner edge to eliminating cutting residue, improving the laminar flow of air. (For diameters 63 and 80 mm, use cutting and chamfering tool ref. PPS CH).

TIGHTENING



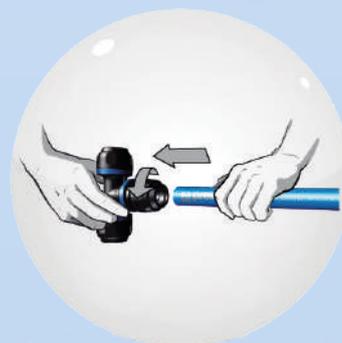
Hand tighten the nut and then use a torque wrench to the specified recommendations. (ref. PPS CLE)

MARKING



Mark the tube to indicate the insertion depth in the fitting (use the reference marks on the fittings or on the wrench).

ASSEMBLY



Unscrew the nut by several turns, and then insert the pipe while rotating it slightly until the recommended depth is reached.
NB: an assembly fluid (ref. PPS AL) is recommended to facilitate the assembly.

LUBRICANT



Ergonomic distribution with optimised energy efficiency

PREVOST offers a range of **compressed air network solutions**.

➔ Wall brackets PrevoS1

Wall fasteners are located on downpipes and **provide a safe and quick single or double fitting**.

- Air intake: G 1/2" or G 3/4"
- Multiple connection profiles
- Material: aluminium alloy
- Robust four-point wall anchoring
- Fitted with manual drain
- Air outlet: two single-press safety fittings
- Anti-whiplash fittings compliant with the ISO 4414 standard ensuring user protection
- Orientable body allowing the button position to be moved
- Quick and easy connection and disconnection



➔ Air treatment units

Air treatment units help to preserve pneumatic tools and equipment. Three treatment levels are recommended :



Cyclone separator: serves to effectively eliminate the largest solid particles and water particles present in compressed air (ref. **SPC**).

Refrigerated dryer: serves to remove water from compressed air, by lowering the air temperature to the dew point (+3°C) under pressure, via heat exchange (ref. **ALF**).

25 µm standard filtration: eliminates contaminants present in compressed air (particles, water, etc.). These contaminants are evacuated via the drain valve at the base of the tank (ref. **ALTO**).

For optimum quality, submicron filtration: eliminates various residual contaminants such as solid particles, liquid particles and oil aerosols present in compressed air, with a filtration efficiency of more than 99.99%. This ensures a high-quality air supply (ref. **MICRO AIR**).

➔ Hose reels

Automatic hose reel: this is an essential item to ensure workshop ergonomics. Its **use saves time and enables flexible distribution hoses** to be used in safety and comfort.

All Prevost automatic hose reels comply with the Machinery Directive 2006/42/EC. The following rules are also applied :

- EN ISO 12100: 2010 "Safety of machinery - General principles for design - Risk assessment and risk reduction"
- EN 13857: 2008 "Safety of machinery - Safety distances to prevent hazard zones being reached by upper and lower limbs"



For more information, contact us: www.prevost.eu

PREVOST PIPING SYSTEM

Finishing touches

➔ Tapping flange

A tapping port flange is used to install a downpipe to supply a workstation. It takes the place of the former gooseneck fittings and serves to limit the presence of condensates.



➔ Low point

Low points are required to ensure correct drainage of condensates. These downpipes must be positioned at strategic locations along the network. Condensates may be drained using any conventional drainage system (electronic drain trap, automatic drain trap, valve). Cut-off valves are used to isolate certain parts of the network for maintenance purposes.



➔ Wall-mounted connection

The angled wall-mounted connection serves to compensate for different centre-to-centre spacings.

Between the filtration assembly and the network.



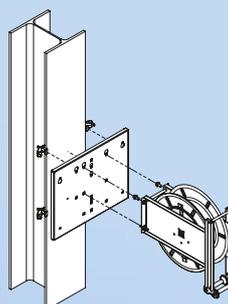
Between the tapping and the wall.



➔ Plates to mount network accessories on IPN / HEA beams


These enable workstations **to be arranged in a safe and ergonomic** manner. The metal plates, used with attachment systems adapted for IPN / HEA beams, **make it possible to fasten equipment in place** quickly and **safely**, without drilling or welding, **in accordance with prevailing requirements**. These plates are designed to receive the following :

- Open and closed reels
- Wall mounts
- **ALTO** air treatment assemblies
- Universal brackets + accessories




PPS SYSTEM ALL ALUMINIUM NETWORKS


PPS - Aluminium blue pipe for compressed air

		A	B	C	D	Pipe OD (mm)	Length (m)	Parts Numbers
			-	-	-	-	16	4
		-	-	-	20	4	PPS BTU2040	
		-	-	-	20	5.5	PPS BTU2055	
		-	-	-	25	4	PPS BTU2540	
		-	-	-	25	5.5	PPS BTU2555	
		-	-	-	32	4	PPS BTU3240	
		-	-	-	32	5.5	PPS BTU3255	
		-	-	-	40	4	PPS BTU4040	
		-	-	-	40	5.5	PPS BTU4055	
		-	-	-	50	5.5	PPS BTU5055	
		-	-	-	63	5.5	PPS BTU6355	
		-	-	-	80	5.5	PPS BTU8055	

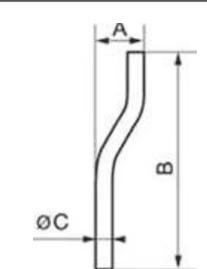
PPS - Aluminium grey pipe for vacuum

		A	B	C	D	Pipe OD (mm)	Length (m)	Parts Numbers
			-	-	-	-	16	4
		-	-	-	20	5.5	PPS GTU2055	
		-	-	-	25	5.5	PPS GTU2555	
		-	-	-	32	5.5	PPS GTU3255	
		-	-	-	40	5.5	PPS GTU4055	
		-	-	-	50	5.5	PPS GTU5055	
		-	-	-	63	5.5	PPS GTU6355	
		-	-	-	80	5.5	PPS GTU8055	

PPS - Aluminium green pipe for nitrogen

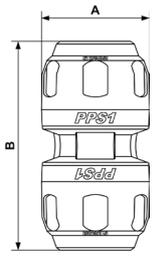
		A	B	C	D	Pipe OD (mm)	Length (m)	Parts Numbers
			-	-	-	-	20	5.5
		-	-	-	25	5.5	PPS VTU2555	

PPS - Aluminium bended link pipe

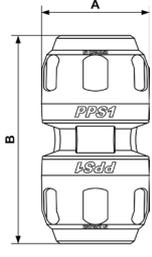
		A	B	C	D	Pipe OD (mm)	Parts Numbers
			86	480	16	-	16
	90	487	20	-	20	PPS LMCB20	
	95	487	25	-	25	PPS LMCB25	

PPS SYSTEM ALL ALUMINIUM NETWORKS

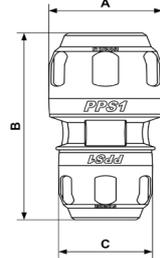
PPS1 UN - Aluminium female union for pipe

		A	B	C	D	For pipe OD (mm)	Parts Numbers
		32	64	-	-	16	PPS1 UN16
		38	78	-	-	20	PPS1 UN20
		46	90	-	-	25	PPS1 UN25
		57	106	-	-	32	PPS1 UN32
		68	125	-	-	40	PPS1 UN40
		84	152	-	-	50	PPS1 UN50
		100	173	-	-	63	PPS1 UN63
		121	205	-	-	80	PPS1 UN80

PPS1 UNS - Aluminium female sliding union for pipe


		A	B	C	D	For pipe OD (mm)	Parts Numbers
		46	90	-	-	25	PPS1 UNS25
		57	106	-	-	32	PPS1 UNS32
		68	125	-	-	40	PPS1 UNS40
		84	152	-	-	50	PPS1 UNS50
		100	173	-	-	63	PPS1 UNS63
		121	205	-	-	80	PPS1 UNS80

PPS1 MR - Aluminium pipe reducing fitting


		A	B	C	D	For pipe OD (mm)	For pipe OD (mm)	Parts Numbers
		46	85	38	-	25	20	PPS1 MR2520
		57	102	46	-	32	25	PPS1 MR3225
		68	122	57	-	40	32	PPS1 MR4032
		84	142	68	-	50	40	PPS1 MR5040
		100	170	84	-	63	50	PPS1 MR6350
		121	194	100	-	80	63	PPS1 MR8063

PPS SYSTEM ALL ALUMINIUM NETWORKS


PPS1 9C - 90° Aluminium equal female elbow fitting for pipe

		A	B	C	D	For pipe OD (mm)	Parts Numbers
		32	62	-	-	16	PPS1 9C16
		38	73	-	-	20	PPS1 9C20
		46	89	-	-	25	PPS1 9C25
		57	106	-	-	32	PPS1 9C32
		68	135	-	-	40	PPS1 9C40
		84	151	-	-	50	PPS1 9C50
		100	180	-	-	63	PPS1 9C63
		121	218	-	-	80	PPS1 9C80


PPS1 9CM - 90° aluminium tapered male threaded elbow fitting for pipe

		A	B	C	D	For pipe OD (mm)	BSPT male thread	Parts Numbers
		32	60	50	26	16	R 3/8	PPS1 9CM1617
		32	60	55	26	16	R 1/2	PPS1 9CM1612
		38	72	61	32	20	R 1/2	PPS1 9CM2012
		46	87	72	38	25	R 1/2	PPS1 9CM2512
		46	87	71	38	25	R 3/4	PPS1 9CM2527
		57	103	88	46	32	R 1	PPS1 9CM3234
		68	123	106	57	40	R 1 1/4	PPS1 9CM4042
		68	123	106	57	40	R 1 1/2	PPS1 9CM4049

PPS1 4C - 45° aluminium equal female elbow fitting for pipe


		A	B	C	D	For pipe OD (mm)	Parts Numbers
		32	70	50	-	16	PPS1 4C16
		38	83	59	-	20	PPS1 4C20
		46	98	70	-	25	PPS1 4C25
		57	117	85	-	32	PPS1 4C32
		68	140	102	-	40	PPS1 4C40

PPS1 B0 - Aluminium female cap for pipe


		A	B	C	D	For pipe OD (mm)	Parts Numbers
		32	45	-	-	16	PPS1 B016
		38	53	-	-	20	PPS1 B020
		46	61	-	-	25	PPS1 B025
		57	70	-	-	32	PPS1 B032
		68	85	-	-	40	PPS1 B040
		84	101	-	-	50	PPS1 B050
		100	124	-	-	63	PPS1 B063
		121	146	-	-	80	PPS1 B080

PPS SYSTEM ALL ALUMINIUM NETWORKS


PPS1 TE - Aluminium equal female tee fitting for pipe

		A	B	C	D	For pipe OD (mm)	Parts Numbers
		38	108	73	-	20	PPS1 TE20
		46	131	89	-	25	PPS1 TE25
		57	155	106	-	32	PPS1 TE32
		68	183	135	-	40	PPS1 TE40
		84	219	151	-	50	PPS1 TE50
		100	261	180	-	63	PPS1 TE63
		121	315	218	-	80	PPS1 TE80

PPS1 TR - Aluminium reducing tee fitting


		A	B	C	D	For pipe OD (mm)	For pipe OD (mm)	Parts Numbers
		38	108	66	32	20	16	PPS1 TR2016
		46	131	78	32	25	16	PPS1 TR2516
		46	131	83	38	25	20	PPS1 TR2520
		57	155	91	32	32	16	PPS1 TR3216
		57	155	96	38	32	20	PPS1 TR3220
		57	155	102	46	32	25	PPS1 TR3225

PPS1 TT - Aluminium parallel female threaded tee fitting for pipe


		A	B	C	D	For pipe OD (mm)	BSP female thread	Parts Numbers
		32	90	40	26	16	G 3/8	PPS1 TT1617
		38	108	47	32	20	G 1/2	PPS1 TT2012
		46	131	56	38	25	G 1/2	PPS1 TT2512
		46	131	56	38	25	G 3/4	PPS1 TT2527
		57	155	68	46	32	G 3/4	PPS1 TT3227
		57	155	68	46	32	G 1	PPS1 TT3234
		68	183	85	57	40	G 3/4	PPS1 TT4027
		68	183	85	57	40	G 1	PPS1 TT4034
		68	183	85	57	40	G 1 1/4	PPS1 TT4042
		84	219	101	72	50	G 1	PPS1 TT5034
		84	219	101	72	50	G 1 1/4	PPS1 TT5042
		84	219	101	72	50	G 1 1/2	PPS1 TT5049
		100	261	129	90	63	G 1	PPS1 TT6334
		100	261	129	90	63	G 1 1/4	PPS1 TT6342
		100	261	129	90	63	G 1 1/2	PPS1 TT6349
		100	261	129	90	63	G 2	PPS1 TT6360
		121	315	155	110	80	G 1	PPS1 TT8034
		121	315	155	110	80	G 1 1/2	PPS1 TT8049
		121	315	155	110	80	G 2	PPS1 TT8060
121	315	155	110	80	G 2 1/2	PPS1 TT8076		

PPS SYSTEM ALL ALUMINIUM NETWORKS

PPS1 MM - Aluminium tapered male threaded straight fitting for pipe


			A	B	C	D	For pipe OD (mm)	BSPT male thread	Parts Numbers
			32	52	26	-	16	R 3/8	PPS1 MM1617
32	58	26	-	16	R 1/2	PPS1 MM1612			
38	65	32	-	20	R 1/2	PPS1 MM2012			
38	67	32	-	20	R 3/4	PPS1 MM2027			
46	73	38	-	25	R 1/2	PPS1 MM2512			
46	74	38	-	25	R 3/4	PPS1 MM2527			
46	78	38	-	25	R 1	PPS1 MM2534			
57	88	46	-	32	R 1	PPS1 MM3234			
57	89	46	-	32	R 1 1/4	PPS1 MM3242			
68	106	57	-	40	R 1 1/4	PPS1 MM4042			
68	106	57	-	40	R 1 1/2	PPS1 MM4049			
84	120	72	-	50	R 1 1/2	PPS1 MM5049			
84	124	72	-	50	R 2	PPS1 MM5060			
100	146	90	-	63	R 2	PPS1 MM6360			
100	152	90	-	63	R 2 1/2	PPS1 MM6376			
121	173	110	-	80	R 2 1/2	PPS1 MM8076			
121	175	110	-	80	R 3	PPS1 MM8090			

PPS1 MF - Aluminium female threaded straight fitting for pipe


			A	B	C	D	For pipe OD (mm)	BSPF female thread	Parts Numbers
			32	53	26	-	16	G 3/8	PPS1 MF1617
32	53	26	-	16	G 1/2	PPS1 MF1612			
38	63	32	-	20	G 1/2	PPS1 MF2012			
38	63	32	-	20	G 3/4	PPS1 MF2027			
46	72	38	-	25	G 1/2	PPS1 MF2512			
46	72	38	-	25	G 3/4	PPS1 MF2527			
46	72	38	-	25	G 1	PPS1 MF2534			
57	83	46	-	32	G 1	PPS1 MF3234			
57	83	46	-	32	G 1 1/4	PPS1 MF3242			
68	98	57	-	40	G 1 1/4	PPS1 MF4042			
68	103	57	-	40	G 1 1/2	PPS1 MF4049			
84	110	72	-	50	G 1 1/2	PPS1 MF5049			
84	115	72	-	50	G 2	PPS1 MF5060			
100	137	90	-	63	G 2	PPS1 MF6360			
100	142	90	-	63	G 2 1/2	PPS1 MF6376			
121	164	110	-	80	G 2 1/2	PPS1 MF8076			
121	164	110	-	80	G 3	PPS1 MF8090			

PPS SYSTEM ALL ALUMINIUM NETWORKS

PPS1 BP - Aluminium tapping flange for pipe


			A	B	C	D	For pipe OD (mm)	For pipe OD (mm)	Parts Numbers
			32	94	70	-	25	16	PPS1 BP2516
38	98	72	-	25	20	PPS1 BP2520			
32	94	70	-	32	16	PPS1 BP3216			
38	98	72	-	32	20	PPS1 BP3220			
32	122	102	-	40	16	PPS1 BP4016			
38	127	102	-	40	20	PPS1 BP4020			
46	130	103	-	40	25	PPS1 BP4025			
32	122	102	-	50	16	PPS1 BP5016			
38	127	102	-	50	20	PPS1 BP5020			
46	130	103	-	50	25	PPS1 BP5025			
38	163	147	-	63	20	PPS1 BP6320			
46	167	147	-	63	25	PPS1 BP6325			
57	165	147	-	63	32	PPS1 BP6332			
38	163	147	-	80	20	PPS1 BP8020			
46	167	147	-	80	25	PPS1 BP8025			
57	165	147	-	80	32	PPS1 BP8032			

PPS1 BT - Aluminium threaded tapping flange for pipe


			A	B	C	D	For pipe OD (mm)	BSPF female thread	Parts Numbers
			32	82	70	-	25	G 1/2	PPS1 BT2512
32	82	70	-	25	G 3/8	PPS1 BT2517			
32	82	70	-	32	G 1/2	PPS1 BT3212			
32	84	70	-	32	G 3/4	PPS1 BT3227			
44	110	102	-	40	G 1/2	PPS1 BT4012			
44	110	102	-	40	G 3/4	PPS1 BT4027			
44	110	102	-	40	G 1	PPS1 BT4034			
44	110	102	-	50	G 3/4	PPS1 BT5027			
44	110	102	-	50	G 1	PPS1 BT5034			
57	161	147	-	63	G 1/2	PPS1 BT6312			
57	161	147	-	63	G 3/4	PPS1 BT6327			
57	162	147	-	63	G 1	PPS1 BT6334			
57	161	147	-	80	G 1/2	PPS1 BT8012			
57	161	147	-	80	G 3/4	PPS1 BT8027			
57	162	147	-	80	G 1	PPS1 BT8034			

PPS SYSTEM ALL ALUMINIUM NETWORKS


PPS1 RSIF - Parallel female threaded valves with fittings for pipe

		A	B	C	D	For pipe OD (mm)	BSPF female thread	Parts Numbers
		32	121	64	25	16	G 1/2	PPS1 RSIF1612
		38	121	66	25	20	G 1/2	PPS1 RSIF2012
		46	125	75	31	25	G 3/4	PPS1 RSIF2527
		57	151	85	40	32	G 1	PPS1 RSIF3234
		68	157	99,10	49	40	G 1 1/4	PPS1 RSIF4042
		84	204,5	122,5	55	50	G 1 1/2	PPS1 RSIF5049
		100	235	285	-	63	G 2	PPS1 RSIF6360
		121	300	250	-	80	G 2 1/2	PPS1 RSIF8076
		Brass body						

PPS1 RSIM - Parallel male threaded valves with fittings for pipe

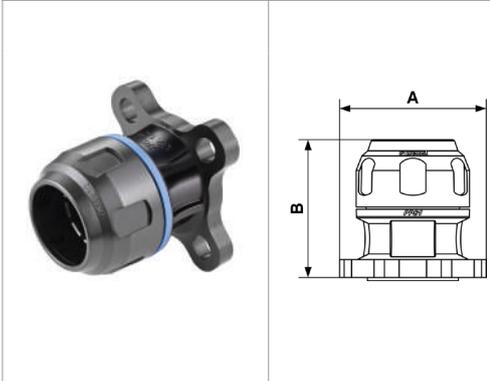
		A	B	C	D	For pipe OD (mm)	BSPT male thread	Parts Numbers
		32	130	64	24	16	R 1/2	PPS1 RSIM1612
		38	130	66	24	20	R 1/2	PPS1 RSIM2012
		46	133	75	27	25	R 3/4	PPS1 RSIM2527
		57	160	85	36	32	R 1	PPS1 RSIM3234
		68	168,5	99,1	47	40	R 1 1/4	PPS1 RSIM4042
		84	215	122,5	50	50	R 1 1/2	PPS1 RSIM5049
Brass body								

PPS1 RSI - Piping valve

		A	B	C	D	For pipe OD (mm)	Parts Numbers	
		32	140	64	-	16		PPS1 RSI16
		38	147	66	-	20		PPS1 RSI20
		46	157	75	-	25		PPS1 RSI25
		57	189	85	-	32		PPS1 RSI32
		68	202	99,1	-	40		PPS1 RSI40
		84	234	122,5	-	50		PPS1 RSI50
		100	320	275	-	63		PPS1 RSI63
		121	394	250	-	80		PPS1 RSI80
		Brass body						

PPS SYSTEM ALL ALUMINIUM NETWORKS

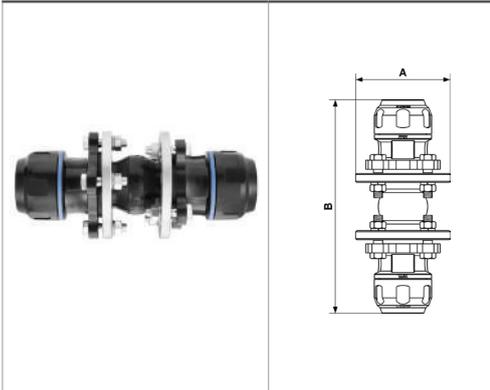
PPS1 UF - Flanges

	A	B	C	D	For pipe OD (mm)	Parts Numbers
	-	-	-	-	63	PPS1 UF63
	-	-	-	-	80	PPS1 UF80

PPS1 LK - Lock kit for valve

	A	B	C	D	For valve Ø (mm)	Parts Numbers
	-	-	-	-	16 to 25	PPS1 LK1625
	-	-	-	-	32 to 40	PPS1 LK3240
	-	-	-	-	50	PPS1 LK50
	-	-	-	-	63 to 80	PPS1 LK6380

PPS1 DK - Dilatation kit

	A	B	C	D	For tube OD (mm)	Parts Numbers
	-	-	-	-	63	PPS1 DK63
	-	-	-	-	80	PPS1 DK80
Attach expansion kits to the wall using clamps : PPS1 CIRS163 for Ø63 PPS1 CIRS180 for Ø80						

PPS1 NUT - Aluminium nut

	A	B	C	D	For fitting Ø (mm)	Parts Numbers
	-	-	-	-	16	PPS1 NUT16
	-	-	-	-	20	PPS1 NUT20
	-	-	-	-	25	PPS1 NUT25
	-	-	-	-	32	PPS1 NUT32
	-	-	-	-	40	PPS1 NUT40
	-	-	-	-	50	PPS1 NUT50
	-	-	-	-	63	PPS1 NUT63
	-	-	-	-	80	PPS1 NUT80

PPS SYSTEM ALL ALUMINIUM NETWORKS

PPS1 SEAL - Internal seal

		A	B	C	D	For fitting Ø (mm)	Quantity	Parts Numbers
		-	-	-	-	16	10	PPS1 SEAL16
		-	-	-	-	20	10	PPS1 SEAL20
		-	-	-	-	25	10	PPS1 SEAL25
		-	-	-	-	32	10	PPS1 SEAL32
		-	-	-	-	40	5	PPS1 SEAL40
		-	-	-	-	50	5	PPS1 SEAL50
		-	-	-	-	63	2	PPS1 SEAL63
		-	-	-	-	80	2	PPS1 SEAL80


PPS1 IP - Internal parts kit

		A	B	C	D	For fitting Ø (mm)	Parts Numbers
		-	-	-	-	16	PPS1 IP16
		-	-	-	-	20	PPS1 IP20
		-	-	-	-	25	PPS1 IP25
		-	-	-	-	32	PPS1 IP32
		-	-	-	-	40	PPS1 IP40
		-	-	-	-	50	PPS1 IP50
		-	-	-	-	63	PPS1 IP63
		-	-	-	-	80	PPS1 IP80

PPS1 BA - 10 Band Kit

		A	B	C	D	For fitting Ø (mm)	Parts Numbers
		-	-	-	-	16	PPS1 BA16
		-	-	-	-	20	PPS1 BA20
		-	-	-	-	25	PPS1 BA25
		-	-	-	-	32	PPS1 BA32
		-	-	-	-	40	PPS1 BA40
		-	-	-	-	50	PPS1 BA50
		-	-	-	-	63	PPS1 BA63
		-	-	-	-	80	PPS1 BA80
(unit of sales = 10 band)							

A3T - 3-pieces female equal socket

		A	B	C	D	BSPP female thread	Parts Numbers
		48.5	53	-	-	G 1	A3T 01
		59	65	-	-	G 1 1/4	A3T 42
		63.5	73	-	-	G 1 1/2	A3T 49
		75.5	89	-	-	G 2	A3T 60

ONE PORTS WALL BRACKETS

Female thread one port wall bracket - 1 coupler and drain - British Profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	BSI 06	BSI 061103WK

Female thread one port wall bracket - 1 coupler and drain - British Profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		-	-	-	-	-	G 1/2	BRM 06	BRM 061103WK

Female thread one port wall bracket - 1 coupler and drain - European Profile - ID passage 7.4 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	ESI 07	ESI 071103WK

Female thread one port wall bracket - 1 coupler and drain - European Profile - ID passage 10.4 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	ESI 11	ESI 111103WK

Female thread single wall bracket - 1 coupler and drain - ISO 6150 B Profile - ID passage 6 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	ISI 06	ISI 061103WK

ONE PORTS WALL BRACKETS


Female thread one port wall bracket - 1 coupler and drain - ISO 6150 B Profile - ID passage 8 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	ISI 08	ISI 081103WK


Female thread one port wall bracket - 1 coupler and drain - ISO 6150 B Profile - ID passage 11 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	ISI 11	ISI 111103WK

Female thread one port wall bracket - 1 coupler and drain - ISO 6150 C Profile - ID passage 6 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	CSI 06	CSI 061103WK

Female thread one port wall bracket - 1 coupler and drain - ISO 6150 C Profile - ID passage 8 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 1 coupling	Parts Numbers
		51	50	38	63	6.5	G 1/2	CSI 08	CSI 081103WK

TWO PORTS WALL BRACKETS


Female thread two port wall bracket - 2 couplers and drain - British Profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 1/2	BSI 06	BSI 068103WK
		71	57	38	70	6.5	G 3/4	BSI 06	BSI 068104WK


Female thread two port wall bracket - 2 couplers and drain - British Profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		-	-	-	-	-	G 1/2	BRM 06	BRM 068103WK
		-	-	-	-	-	G 3/4	BRM 06	BRM 068104WK


Female thread two port wall bracket - 2 couplers and drain - European Profile - ID passage 7.4 mm and British profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 3/4	ESI 07 BSI 06	ESI 078104WKB6

Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID 11 mm and British Profile - ID 6 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 3/4	ISG 11 BSI 06	ISG 118104WKB6

Female thread two ports wall bracket - 2 couplers and drain - European Profile - ID passage 7.4 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 1/2	ESI 07	ESI 078103WK
		71	57	38	70	6.5	G 3/4	ESI 07	ESI 078104WK

TWO PORTS WALL BRACKETS


Female thread two port wall bracket - 2 couplers and drain - European Profile - ID passage 10.4 mm

			A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
			71	57	38	70	6.5	G 3/4	ESI 11	ESI 118104WK


Female thread two port wall bracket - 2 couplings and drain - European Profile - ID passage 10.4 mm and 7.4 mm

			A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
			71	57	38	70	6.5	G 3/4	ESI 11 ESI 07	ESI 118104WKE7

Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID passage 6 mm and European Profile - ID passage 7.4 mm


			A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
			71	57	38	70	6.5	G 3/4	ISI 06 ESI 07	ISI 068104WKE7

Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID passage 6 mm


			A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
			71	57	38	70	6.5	G 1/2	ISI 06	ISI 068103WK
			71	57	38	70	6.5	G 3/4	ISI 06	ISI 068104WK

TWO PORTS WALL BRACKETS


Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID passage 8 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 1/2	ISI 08	ISI 088103WK
		71	57	38	70	6.5	G 3/4	ISI 08	ISI 088104WK


Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID passage 8 mm and 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 3/4	ISI 08 ISI 06	ISI 088104WKI6

Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID passage 11 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 3/4	ISI 11	ISI 118104WK

Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B Profile - ID passage 11 mm and 6 mm


		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
		71	57	38	70	6.5	G 3/4	ISI 11 ISI 06	ISI 118104WKI6

TWO PORTS WALL BRACKETS


Female thread two port wall bracket - 2 couplers and drain - ISO 6150 B and ISO 6150 C Profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
				71	57	38	70	6.5	G 3/4


Female thread two port wall bracket - 2 couplers and drain - ISO 6150 C Profile - ID passage 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
				71	57	38	70	6.5	G 1/2
71	57			38	70	6.5	G 3/4	CSI 06	CSI 068104WK

Female thread two port wall bracket - 2 couplers and drain - ISO 6150 C Profile - ID passage 8 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
				71	57	38	70	6.5	G 1/2
71	57			38	70	6.5	G 3/4	CSI 08	CSI 088104WK

Female thread two port wall bracket - 2 couplings and drain - ISO 6150 C Profile - ID passage 8 mm and 6 mm

		A	B	C	D	E	Inlet BSPP female thread	Outlet : 2 couplings	Parts Numbers
				71	57	38	70	6.5	G 3/4

MULTI PORT WALL BRACKETS

Female thread wall bracket - Couplers and drain profile - British profile - ID passage 6 mm

		Inlet BSPP female thread	Outlet	Parts Numbers
		G 3/4	4 x BSI 06	MF 104S4BS
		G 3/4	6 x BSI 06	MF 104S6BS
		G 3/4	8 x BSI 06	MF 104S8BS
		G 3/4	10 x BSI 06	MF 104S10BS

Female thread wall bracket - Couplers and drain - European profile - ID passage 7.4 mm

		Inlet BSPP female thread	Outlet	Parts Numbers
		G 3/4	4 x ESI 07	MF 104S4ES
		G 3/4	6 x ESI 07	MF 104S6ES
		G 3/4	8 x ESI 07	MF 104S8ES
		G 3/4	10 x ESI 07	MF 104S10ES

Female thread wall bracket - Couplers and drain - ISO 6150 B profile - ID passage 6 mm


		Inlet BSPP female thread	Outlet	Parts Numbers
		G 3/4	4 x ISI 06	MF 104S4IS
		G 3/4	6 x ISI 06	MF 104S6IS
		G 3/4	8 x ISI 06	MF 104S8IS
		G 3/4	10 x ISI 06	MF 104S10IS

Female thread wall bracket - Couplers and drain - ISO 6150 C profile - ID passage 6 mm


		Inlet BSPP female thread	Outlet	Parts Numbers
		G 3/4	4 x CSI 06	MF 104S4CS
		G 3/4	6 x CSI 06	MF 104S6CS
		G 3/4	8 x CSI 06	MF 104S8CS
		G 3/4	10 x CSI 06	MF 104S10CS

WALL BRACKETS

Female thread single wall bracket - Outlet 1 coupler and drain


			A	B	C	D	E	Inlet BSPP female thread	Outlet BSPP female thread	Parts Numbers
			51	50	38	63	6.5	G 1/2	G 1/2	MF 103S1

Female thread double wall bracket - Outlet 2 couplers and drain

			A	B	C	D	E	Inlet BSPP female thread	Outlet BSPP female thread	Parts Numbers
			71	57	38	70	6.5	G 1/2	G 1/2	MF 103S2
			71	57	38	70	6.5	G 3/4	G 1/2	MF 104S2

NAKED MULTIPLE WALL MOUNTED BRACKET

Manifold

			A	B	C	D	E	Inlet BSPP female thread	Number of outlet	Outlet BSPP female thread	Parts Numbers
			78	100	63	80	63	G 3/4	4	G 1/2	MF 104S4
			78	145	63	125	63	G 3/4	6	G 1/2	MF 104S6
			78	190	63	170	63	G 3/4	8	G 1/2	MF 104S8
			78	235	63	215	63	G 3/4	10	G 1/2	MF 104S10

ACCESSORIES FOR PPS RINGMAIN ASSEMBLY

PPS1 CLE - Tightening wrench

	A	B	C	D	For fitting Ø (mm)	Parts Numbers
	-	-	-	-	16	PPS1 CLE16
	-	-	-	-	20	PPS1 CLE20
	-	-	-	-	25	PPS1 CLE25
	-	-	-	-	32	PPS1 CLE32
	-	-	-	-	40	PPS1 CLE40
	-	-	-	-	50	PPS1 CLE50
	-	-	-	-	63	PPS1 CLE63
	-	-	-	-	80	PPS1 CLE80

PPS CLESTD - Neutral hook spanner

	A	B	C	D	For fitting Ø (mm)	Parts Numbers
	-	-	-	-	16 to 80	PPS CLESTD

PPS SP - Drill for taping flange

	A	B	C	D	Drill Ø (mm)	For pipe OD (mm)	Parts Numbers
	-	-	-	-	16	25 to 32	PPS SP16
	-	-	-	-	22	40 to 50	PPS SP22
	-	-	-	-	30	63 to 80	PPS SP30
Boring through for PPS1 BT and PPS1 BP flange							

PPS CHE - Pipe chamfering and deburring tools

	A	B	C	D	For tube OD (mm)	Function	Parts Numbers
	-	-	-	-	(1) 16 to 50	-	PPS CH50
	-	-	-	-	(2) 16 to 50	-	PPS CHP50
	-	-	-	-	(4) 63 to 80	-	PPS CH110

PPS AL - Liquid for assembly


	A	B	C	D	Capacity (ml)	Parts Numbers
	-	-	-	-	650	PPS AL

ACCESSORIES FOR PPS RINGMAIN ASSEMBLY


PPS CTU - Pipe cutter

		A	B	C	D	For pipe OD (mm)	Parts Numbers
		-	-	-	-	16 to 63	PPS CTU63
		-	-	-	-	63 to 80	PPS CTU110

PPS1 CI - Piping clamp (unit of sales = 1 box of 5 clamps)

		A	B	C	D	For pipe OD (mm)	Thread	Parts Numbers
		24	47	-	-	16	M8	PPS1 CI16
		24	49	-	-	20	M8	PPS1 CI20
		29	53	-	-	25	M8	PPS1 CI25
		38	57	-	-	32	M8	PPS1 CI32
		49	99,5	-	-	40	M8	PPS1 CI40
		59	104,5	-	-	50	M8	PPS1 CI50
		75	135	-	-	63	M8	PPS1 CI63
		90	145	-	-	80	M8	PPS1 CI80

PPS1 CIS - Spacer for piping clamp

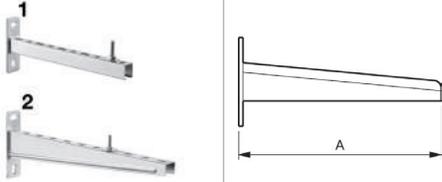
		A	B	C	D	Length (mm)	Parts Numbers
		46	25	38,50	35	(1) 35	PPS1 CIS1632
		60,50	35	25	20	(2) 20	PPS1 CIS4050

PPS1 CIRSI - Bracket for valve

		A	B	C	D	For pipe OD (mm)	Parts Numbers
		-	-	-	-	16	PPS1 CIRSI16
		-	-	-	-	20	PPS1 CIRSI20
		-	-	-	-	25	PPS1 CIRSI25
		-	-	-	-	32	PPS1 CIRSI32
		-	-	-	-	40	PPS1 CIRSI40
		-	-	-	-	50	PPS1 CIRSI50
		-	-	-	-	63	PPS1 CIRSI63
		-	-	-	-	80	PPS1 CIRSI80

ACCESSORIES FOR PPS RINGMAIN ASSEMBLY

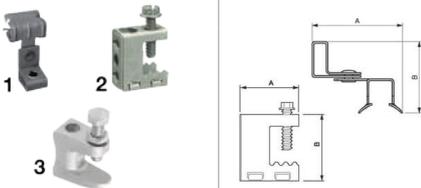
Metal support bracket

	A	B	C	D	Length (mm)	Max load distributed over the entire length (kg)	Parts Numbers
	180	-	-	-	(1) 180	133	CS 180L
	300	-	-	-	(1) 300	80	CS 310L
	420	-	-	-	(1) 420	56.4	CS 420L
	510	-	-	-	(2) 510	75	CS 500

Screw for metal support

	A	B	C	D	Length (mm)	Metric thread	Parts Numbers
	-	-	-	-	-	20	M8

M8 Beam clip

	A	B	C	D	Panel thickness (mm)	Metric thread	Parts Numbers	
	47	45	-	-	(1) 3 to 8			CP 38
	53	45	-	-	(1) 8 to 14			CP 814
	58	45	-	-	(1) 14 to 20			CP 1420
	30	34	-	-	(2) 0 to 16		M6 or cross-piece	CP 016
	-	-	-	-	(3) 1 to 18		M8	CP M8

ACCESSORIES FOR PPS RINGMAIN ASSEMBLY

Suspension system for piping clamp

		A	B	C	D	Length (v)	Metric thread	Parts Numbers
				-	-	-	-	2

Screw Ø 6 mm

		A	B	C	D	Length (mm)	Parts Numbers	
							60	TVB 660
							90	TVB 690

M8 threaded hanger galvanized stud

		A	B	C	D	Length (mm)	Use	Metric thread	Parts Numbers	
							50	For use with all construction materials	M8	PV 80
							80	For use with all construction materials	M8	PV 880

M8 Stud

		A	B	C	D	Metric thread	Parts Numbers
							

M8 threaded stud

		A	B	C	D	Description	Metric thread	Length (m)	Parts Numbers	
							Threaded stud	M8	1	TF M8100
							Union for M8 threaded stud	M8	-	TL RM8
							Lock Nut	M8	-	TE M8

PPS RANGE CASE

PPS CK - Tightening wrenches case

	Includes	Parts Numbers
	<ul style="list-style-type: none"> - 1 Tightening wrench Ø 16 mm: PPS1 CLE16 - 1 Tightening wrench Ø 20 mm: PPS1 CLE20 - 1 Tightening wrench Ø 25 mm: PPS1 CLE25 - 1 Tightening wrench Ø 32 mm: PPS1 CLE32 - 1 Marker pen: PPS1 PEN 	PPS CK1632
	<ul style="list-style-type: none"> - 1 Tightening wrench Ø 40 mm: PPS1 CLE40 - 1 Tightening wrench Ø 50 mm: PPS1 CLE50 - 1 Marker pen: PPS1 PEN 	PPS CK4050
	<ul style="list-style-type: none"> - 1 Tightening wrench Ø 63 mm: PPS1 CLE63 - 1 Tightening wrench Ø 80 mm: PPS1 CLE80 - 1 Marker pen: PPS1 PEN 	PPS CK6380

PPS CT - Tools case for pipes preparation

	Includes	Parts Numbers
	<ul style="list-style-type: none"> - 1 Tube cutter for PPS tube Ø ext. 16 to 63 mm: PPS CTU63 - 1 Chamfering tool for tube Ø ext. 16 to 50 mm: PPS CH50 - 1 Deburring int/ext: PPS CHERAP - 1 Hole saw for drilling tube Ø 16 to 32 mm: PPS SP16 - 1 Hole saw for drilling tube Ø 40 to 50 mm: PPS SP22 - 1 Marker pen: PPS PEN 	PPS CT1650

LINKING HOSES

Flexible hoses to compensate for network expansion and contraction - Tapered male swivel connections

	BSPT male thread	Length (m)	Bend radius (at 20°C)(mm)	Max operating pressure (bar)	Temperature	Parts Numbers
	R 1/2	0.75	180	160	-40° +70°	LAM 21
	R 3/4	0.75	240	105	-40° +70°	LAM 27
	R 1	0.75	300	88	-40° +70°	LAM 34
	R 1 1/4	1.1	420	63	-40° +70°	LAM 42
	R 1 1/2	1.25	500	50	-40° +70°	LAM 49
	R 2	1	630	40	-40° +70°	LAM 60

Connection hoses - Female swivel connections

	BSPB female thread	Length (m)	Bend radius (at 20°C)(mm)	Max operating pressure (bar)	Temperature	Parts Numbers
	G 3/8	1.5	130	180	-40° +110°	LEF 17
	G 1/2	1.5	130	160	-40° +110°	LEF 21
	G 3/4	1.5	240	105	-40° +110°	LEF 27
	G 1	1.5	300	88	-40° +110°	LEF 34
	G 1 1/4	2.2	420	63	-40° +110°	LEF 42
	G 1 1/2	2.5	500	50	-40° +110°	LEF 49
G 2	2	630	80	-40° +110°	LEF 60	

Connection hoses with steel safety cable - Female swivel connections

	BSPB female thread	Length (m)	Bend radius (at 20°C)(mm)	Max operating pressure (bar)	Temperature	Parts Numbers
	G 3/8	1.5	130	180	-40° +110°	LEF 17S
	G 1/2	1.5	130	160	-40° +110°	LEF 21S
	G 3/4	1.5	240	105	-40° +110°	LEF 27S
	G 1	1.5	300	88	-40° +110°	LEF 34S

Connection hoses - Male swivel connections

	BSPT male thread	Length (m)	Bend radius (at 20°C)(mm)	Max operating pressure (bar)	Temperature	Parts Numbers
	R 3/8	1.5	130	180	-40° +110°	LEM 17
	R 1/2	1.5	180	160	-40° +110°	LEM 21
	R 3/4	1.5	240	105	-40° +110°	LEM 27
	R 1	1.5	300	80	-40° +110°	LEM 34
	R 1 1/4	2.2	420	63	-40° +110°	LEM 42
	R 1 1/2	2.5	500	50	-40° +110°	LEM 49
R 2	2	630	80	-40° +110°	LEM 60	

Connection hoses with safety cable - Male swivel connections

	BSPT male thread	Length (m)	Bend radius (at 20°C)(mm)	Max operating pressure (bar)	Temperature	Parts Numbers
	R 3/8	1.5	130	180	-40° +110°	LEM 17S
	R 1/2	1.5	180	160	-40° +110°	LEM 21S
	R 3/4	1.5	240	105	-40° +110°	LEM 27S
R 1	1.5	300	88	-40° +110°	LEM 34S	

PREVOST SAS
15, rue du Pré Faucon
C.S. 90208 - 74942 Annecy-le-Vieux - France
Tel : +33 (0)4 50 64 04 45 - Fax : +33 (0)4 50 64 00 10
E.mail : sales@prevost.eu - www.prevost.eu



This document is non-contractual.
PREVOST reserves the right to modify the features of its
range without prior notice.
Publication PREVOST - 03.2017